


# AptPak Apartment Compactor TP-33



## TP-33 Dimensions

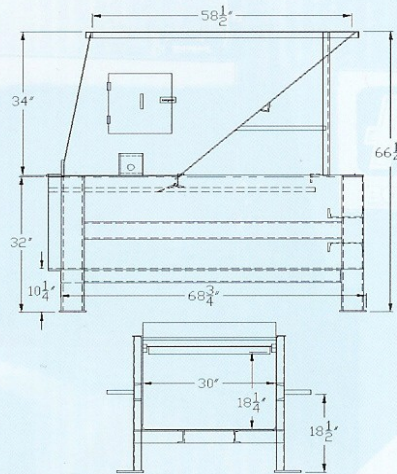

### STANDARD FEATURES

- Remote Power Unit
- Totally 100% UL Approved
- Hopper with Access Interlock Switch
- Photoelectric Eye Auto Start System
- Full Container Light
- Ratchet or Chain Binding Design
- Warning Alarm & Flashing Beacon
- Heavy Duty Structural Steel Design
- Remote Controls on 13' Sealtite

### OPTIONAL FEATURES

- 2 or 3 cu yd front load or rear load cans
- 5 HP
- Single Phase or 575v motors
- Custom Feed Hopper Designs

Distributed by:

### CAPACITY SPECIFICATIONS:

Charge Box Capacity	
Mfg Rating	.33 cu yds
Wastec Rating	.28 cu yds
Clear Top Opening	24" L x 30" W
Capacity per Hour	36.5 cu yds

### PERFORMANCE SPECIFICATIONS:

Cycle Time	33 secs
Normal Force	14,130 lbs
Max Force	16,245 lbs
Normal Ram Force	24.2 psi
Max Ram Force	26.8 psi
Ram Penetration	8"

### ELECTRICAL SPECIFICATIONS:

Tri-Voltage Motor	
*HP upgrade	3 hp
Cycle time	5 hp
Control Voltage	18 secs
Totally UL approved:	120 VAC
Remote or Mounted control box with controls mounted in Nema 4 enclosure, key start, E-stop button, photoelectric eye, electrical interlock switch, alert horn and flashing beacon.	

### HYDRAULIC SPECIFICATIONS:

Pump	3.1 gpm
Normal System Pressure	2,000 psi
Max System Pressure	2,300 psi
Cylinder	3"
Unit Weight	2,000 lbs

\*5 HP upgrade with 5.1 gpm pump

# CHUTE MASTER™

INDOOR ENVIRONMENTAL SERVICES

## (800) 234 4656

www.chutemaster.com

Email: sales@chutemaster.com